



Łańcuchy sworzniowe (GALLA) wg PN-74/M-84110, DIN 8150

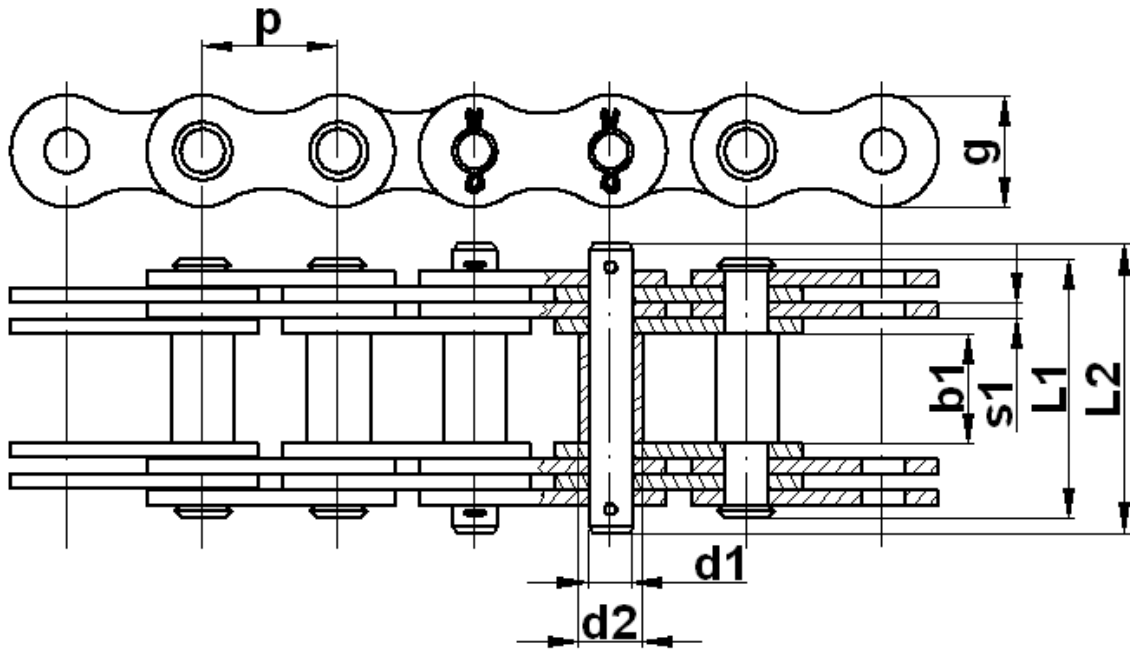

Łańcuch	p mm	b1 mm min	d1 mm max	d2 mm max	L1 mm max	L2 mm max	g mm	s mm	x	Q kg/m	F <sub>B</sub> kN
DG25	25	18	8	10	36	42	18	3	2	1,75	25
DG25K	25	18	8	10	36	42	18	3	2	1,75	50
DG30	30	20	9	11	51	58	20	3	4	3,4	40
DG30K	30	20	9	11	51	58	20	3	4	3,4	70
DG35	35	22	10	12	53	61	26	3	4	4,5	60
DG35K	35	22	10	12	53	61	26	3	4	4,5	90
DG40	40	25	12	14	58	66	30	3	4	4,7	80
DG40K	40	25	12	14	58	66	30	3	4	4,7	110
DG45	45	30	14	17	63	70	35	3	4	6,4	100
DG45K	45	30	14	17	63	70	35	3	4	6,4	140

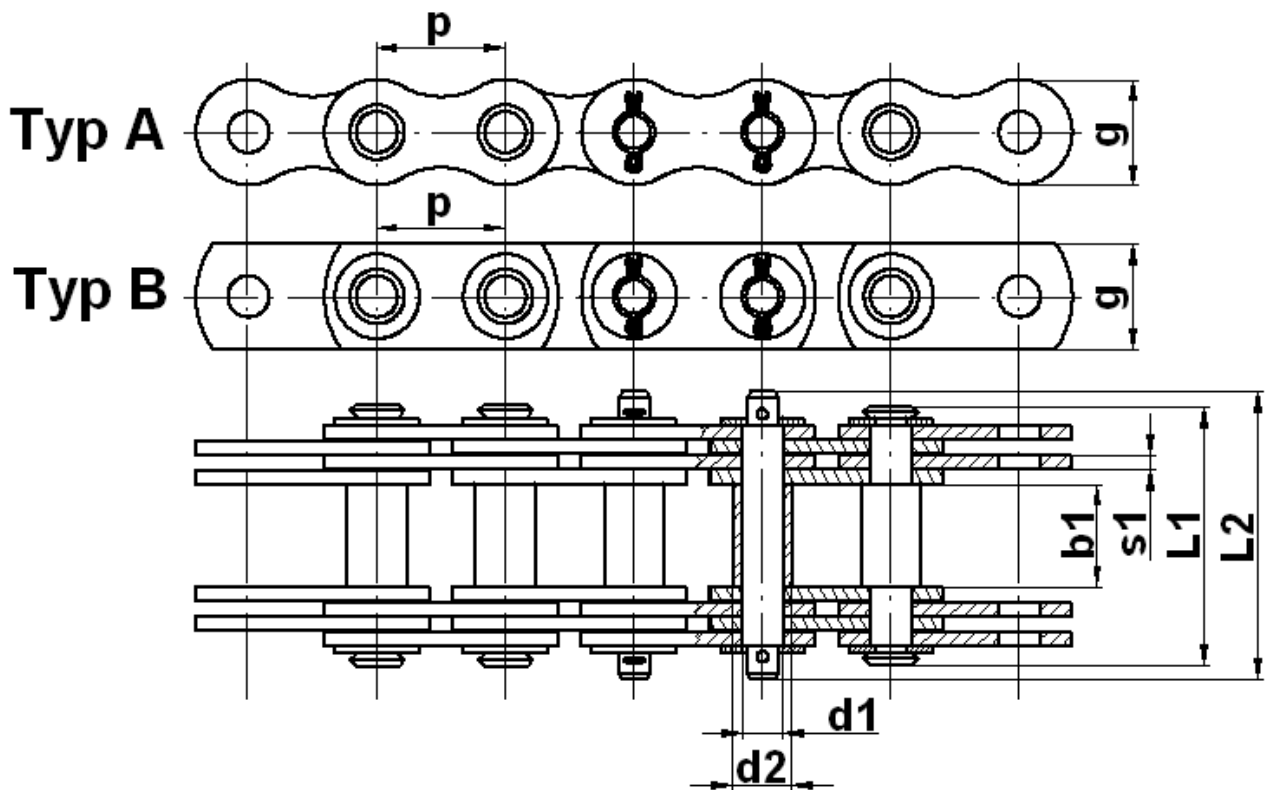

Łańcuch	Typ	p mm	b1 mm min	d1 mm max	d2 mm max	L1 mm max	L2 mm max	g mm	s1 mm	x	Q kg/m	F <sub>B</sub> kN
DG50	A	50	35	18	22	90	97	38	4,5	4	10,6	150
DG55	A	55	40	21	24	108	115	40	6,0	4	15,5	200
DG60	A	60	45	23	26	114	120	45	6,0	4	18,0	250
DG70	B	70	50	28	32	148	157	55	6,0	6	33,5	375
DG80	B	80	60	32	36	159	171	60	6,0	6	38,2	500
DG90	B	90	70	36	40	184	200	70	7,0	6	53,0	750
DG100	B	100	80	40	45	224	239	80	7,0	8	76,6	1000
DG110	B	110	90	45	50	236	251	90	7,0	8	90,0	1250
DG120	B	120	100	50	55	262	277	100	8,0	8	112,0	1500

**FB** - obciążenie zrywające  
**q** - waga 1 m