


Łańcuchy z płytkami wygiętymi

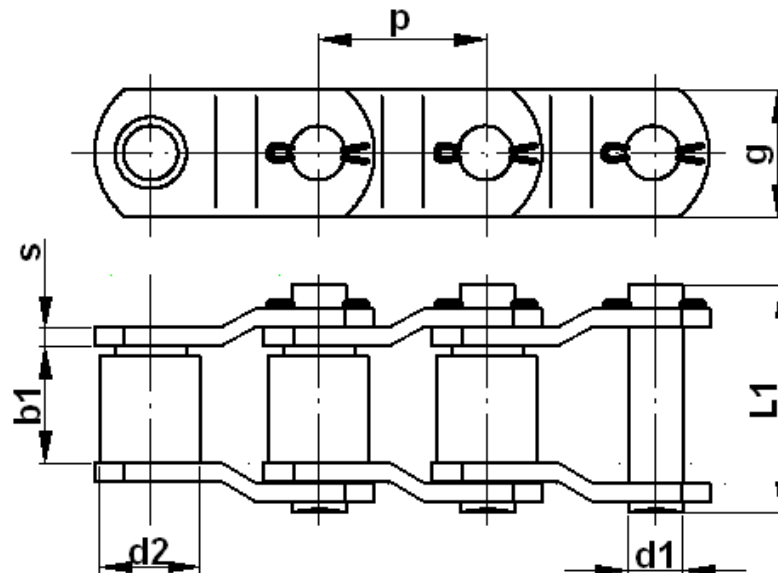

Łańcuch	p		b ₁ mm min	g mm	s mm	d ₁ mm	d ₂ mm	l ₁ mm	FB kg	q kg/m
	mm	inch								
RV-3067X	77,9	3,067	40,0	51	9,5	19,00	41,30	98,7	50 000	19,1
RV-3	78,1	3,075	38,1	45	8,0	17,92	31,75	93,0	34 000	12,3
RV-1664A	101,6	4,000	55,5	82	14,0	30,18	57,15	141,0	113 500	41,4
RV-4	103,2	4,063	49,2	60	14,0	23,92	44,45	129,0	68 000	26,4
RV-4 UP	103,2	4,063	49,2	60	14,0	23,92	60,00	129,0	68 000	31,0
RV-E 4073	103,4	4,073	49,5	60	14,0	25,40	45,20	131,0	77 100	27,2
RV-1605 AAA	127,0	5,000	64,5	90	14,0	34,90	63,50	168,5	170 000	59,6

FB - obciążenie zrywające
q - waga 1 m