


## Łańcuchy zębate z środkowym prowadzeniem



Łańcuch <i>Chain</i>	P mm	b min mm	d <sub>1</sub> max mm	L max mm	L <sub>c</sub> max mm	h <sub>1</sub> mm	h <sub>2</sub> max mm	T max mm	G	n	F <sub>B</sub> min daN	q kg/m
CL06	9,525	13,5	3,95	18,5	20,0	5,3	10,0	1,5	O	9	1000	0,60
		16,5		21,5	23,0				O	11	1250	0,73
		19,5		24,5	26,0				O	13	1500	0,85
		22,5		27,5	29,0				O	15	1750	1,00
		28,5		33,5	35,0				I	19	2250	1,26
CL08	12,70	19,5	5,08	24,5	26,0	7,0	13,4	1,5	O	13	2340	1,15
		22,5		27,5	29,0				O	15	2740	1,33
		25,5		30,5	32,0				O	17	3130	1,50
		28,5		33,5	35,0				I	19	3520	1,68
		34,5		39,5	41,0				I	23	4300	2,04
		40,5		45,5	47,0				I	27	5080	2,39
		46,5		51,5	53,0				I	31	5860	2,74
		52,5		57,5	59,0				I	35	6640	3,10
		30,0		37,0	38,2				I	15	4560	2,21
CL10	15,875	38,0	5,92	45,0	46,2	8,7	16,7	2,0	I	19	5860	2,80
		46,0		53,0	54,2				I	23	7170	3,39
		54,0		61,0	62,4				I	27	8470	3,99
		62,0		69,0	70,4				I	31	9770	4,58
		38,0		45,0	46,5				I	19	7000	3,37
CL12	19,05	46,0	6,90	53,0	54,5	10,5	20,0	2,0	I	23	8600	4,08
		54,0		61,0	62,8				I	27	10200	4,78
		62,0		69,0	70,8				I	31	11700	5,50
		70,0		77,0	78,8				I	35	13300	6,20
		45,0		52,0	53,5				I	15	11100	5,31
CL16	25,40	51,0	8,90	58,0	59,5	14,0	26,7	3,0	I	17	12500	6,02
		57,0		64,0	65,5				I	19	14100	6,37
		69,0		76,2	77,7				I	23	17200	8,15
		81,0		88,2	89,7				I	27	20300	9,57
		93,0		100,2	101,7				I	31	23500	10,98
		57,0		66,6	69,6				I	19	16500	8,42
CL20	31,75	69,0	10,84	78,6	81,6	17,5	33,4	3,0	I	23	20100	10,19
		81,0		90,6	93,6				I	27	23700	11,96
		93,0		102,6	105,6				I	31	27300	13,73
		105,0		114,6	117,6				I	35	31000	15,50
		117,0		126,6	129,6				I	39	34600	17,27

FB - obciążenie zrywające  
q - waga 1 m

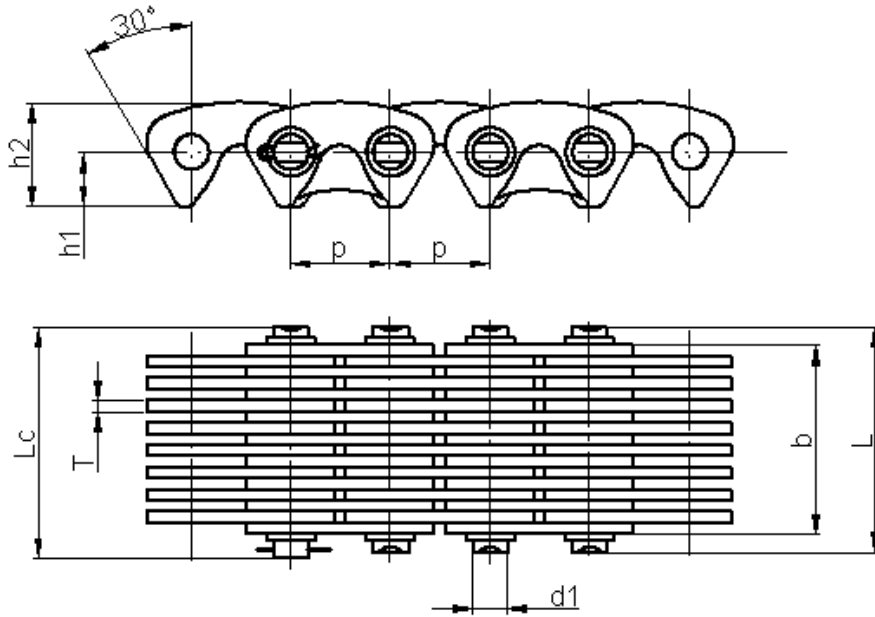